

Date: Tuesday, 5/23/2006 8:12:43 AM
 User: Kim Johnston

Process Sheet

SPLIT-23

Customer : CU-DAR001 Dart Helicopters Services
 Job Number : 27161
 Estimate Number : 12402
 P.O. Number : N/A
 This Issue : 5/23/2006 S.O. No. : N/A
 Prsht Rev. : NC
 First Issue : N/A Type : SMALL / MED FAB
 Previous Run : 27005
 Written By : SEE COMMENT BELOW
 Checked & Approved By : 06.05.23 N
 Comment : Est Rev:A New Issue 06-05-04 9:22

Drawing Name : RUN-ON LANDING WEARPLATE KIT
 Part Number : DSI9328011
 Drawing Number : DSI9328 REV A
 Project Number : N/A
 Drawing Revision : A
 Material : N/A
 Due Date : 6/10/2006 Qty: 10 Um: Each

Additional Product

Job Number:



Seq. #: Machine Or Operation: Description :

1.0 DC DOCUMENT CONTROL



Comment: Photocopy bluefile & type labels per PPP DSI 9328 CHG001

KT 06.06.19

2.0 PACKAGING 1 PACKAGING RESOURCE #1



Comment: PACKAGING RESOURCE #1

Pick Packing Kit

3.0 D3511041 WEARPLATE ASSEMBLY



Comment: Qty.: 2.0000 Each(s)/Unit Total : 20.0000 Each(s)

WEARPLATE ASSEMBLY

Batch: B27194 4 mcy

B27194 10 mcy

4.0 AN417A Bolt



Comment: Qty.: 16.0000 Each(s)/Unit Total : 160.0000 Each(s)

Bolt

Batch: M19471

(80)

06/05/29

5.0 MS21042L4 Nut



Comment: Qty.: 16.0000 Each(s)/Unit Total : 160.0000 Each(s)

Nut

Batch: M19085

(80)

06/05/29

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: RUN-ON LANDING WEARPLATE KIT

Job Number: 27161

Part Number: DSI9328011

Job Number:



Seq. #:

Machine Or Operation:

Description:

6.0

QC4

INSPECT 100% KITS FOR COMPLETENESS



Comment: INSPECT 100% KITS FOR COMPLETENESS

06/17/24 (5)
C206/30/06 (2) (3)

7.0

PACKAGING 1

PACKAGING RESOURCE #1



Comment: PACKAGING RESOURCE #1

Identify and pack for shipping as per PPP DSI9328

Location:

PPP Rev:

A A

06/15/28 (3)

06/16/30 (2)

06/17/24 (5)

8.0

DC

DOCUMENT CONTROL



Comment: DOCUMENT CONTROL

Inspection Level 21

06/07/25 (5)

Job Completion



06.07.24




DESIGN <i>PH</i>	DRAWN BY <i>PH</i>	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
CHECKED <i>[Signature]</i>	APPROVED <i>[Signature]</i>	DRAWING NO. DSI 9328	REV. A SHEET 1 OF 1
DATE 06.04.20		TITLE RUN-ON LANDING WEARPLATE KIT	SCALE NTS
A	06.04.20	NEW ISSUE	

DART SERVICE INSTRUCTION

TO AMEND INSTALLATION INSTRUCTIONS D205-564 Rev. D / IIN-D430-688 Rev. B
REF. CANADIAN STC: SH96-42 / SH01-56
REF. FAA STC: SR00571NY / SR01404NY

The DSI-9328-011 Run-on Landing Wearplate Kit can be installed on Dart D205-564-011 / D430-688-011 Bearpaw Installations (kit K10015 Change 002 or later only). Earlier model bearpaws can be made compatible with DSI-9328-011 kit by opening up counter bores to Ø0.930. The wearplate kit includes two stainless steel wearplates that fit to the bottom of the Dart Bearpaws. Install the wearplates as shown below. Note that the D2529 washers are not required when the D3511-041 wearplates are installed.

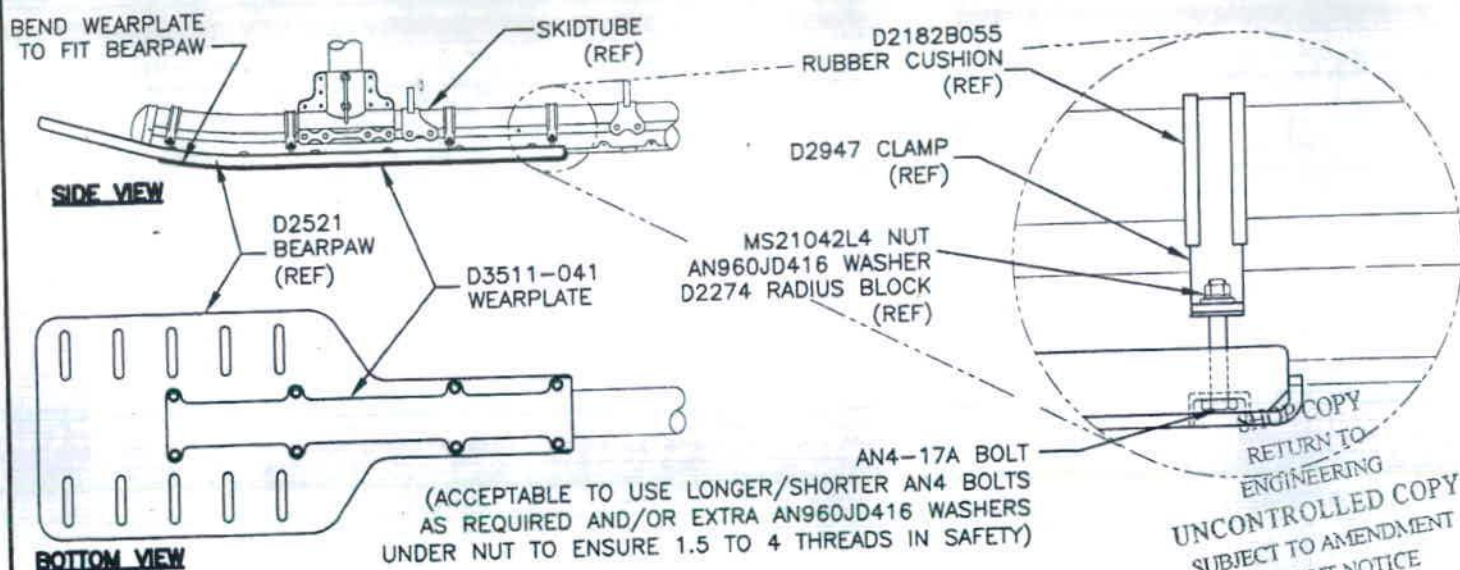

WEIGHT AND BALANCE

Installation	Weight	LATERAL		LONGITUDINAL	
		Arm	Moment	Arm	Moment
DSI-9328-011 (204)	15.0 lb 6.8 kg	0	0	146.5 in 3.72 m	2198 in-lb 25.3 m-kG
DSI-9328-011 (205/212/412)	15.0 lb 6.8 kg	0	0	159.0 in 4.04 m	2385 in-lb 27.5 m-kG
DSI-9328-011 (222U/230/430)	15.0 lb 6.8 kg	0	0	283.3 in 7.20 m	4250 in-lb 49.0 m-kG

PARTS LIST

QTY	Part Number	Description
X	DSI-9328-011	RUN-ON LANDING WEARPLATE KIT
2	D3511-041	Wearplate
16	AN4-17A	Bolt
16	MS21042L4	Nut

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-Q-01

APPROVED

BY: *[Signature]*
D. SHEPHERD (DE # 02)

DATE: 06.04.20
CERT. NO.: SH96-42 / SH01-56
ISSUE NO.: 3 / 1

Copyright © 2006 by DART AEROSPACE LTD

THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.

